

Tile Series Button Panel 2.0

Product name	Buttons	Model No.
Tile Series Button Panel 2.0 (Plastic version)	1 Button Panel A	HDL-MP1B/TILE.48
	1 Button Panel B	HDL-MP2S/TILE.48
	2 Buttons Panel A	HDL-MP2B/TILE.48
	2 Buttons Panel B	HDL-MP4S/TILE.48
	4 Buttons Panel A	HDL-MP4B/TILE.48
	4 Buttons Panel B	HDL-MP4B-A/TILE.48
	Frames	HDL-MP1-EC/TILE.48

buspro

Datasheet

Issued: April 21, 2020

File Edition: C



Figure 1. 1 Button Panel A



Figure 2. 1 Button Panel B



Figure 3. 2 Buttons Panel A



Figure 4. 2 Buttons Panel B



Figure 5. 4 Buttons Panel A



Figure 6. 4 Buttons Panel B




Figure 6-1. 1 Button Panel A/1 Button Panel B





Figure 6-2. 4 Buttons Panel A/4 Buttons Panel B

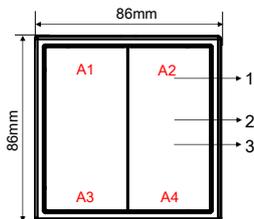

2 Buttons Panel A/2 Buttons Panel B

Figure 7. Dimensions - Plastic version



Figure 8. Dimensions - Side View




Figure 9. Components - Back View

Overview

Tile series Button Panel 2.0 (See Figure 1-6) contains 1/2/4-button panels. Icons and text of each button supports laser labelling. With built-in RGB backlight for each pushbutton, the color and brightness level can be set by HDL Buspro Setup Tool or manually set on the panel. The panels support controls of lighting, curtains, scenes, music, etc.

Functions

- Built-in temperature sensor
- Built-in proximity sensor
- Icons and text of each button support laser labelling.
- Adjustable backlight brightness level via HDL Buspro Setup Tool or manual setting on the panel.
- Button modes: Single on/off, Single on, Single off, Combination on, Combination off, Combination on/off, Double click/single on/off, Double click/combination on/off, Momentary, Short/long press, Short press/long momentary.
- Control types: Scene, Sequence, Timer Switch, Universal Switch, Single Channel Lighting Control, Broadcast Scene, Broadcast Channel, Curtain Switch, GPRS Control, Panel Control, Security Module, Music Control, General Control, etc.
- Button lock function.
- Online update via HDL Buspro Setup Tool.

Important Notes

- Two buttons can be combined into one; for instance, A1 & A5 or A2 & A6 in Figure 6-2.
- The panel should be mounted on the wall box with power interface.
- It is recommended to connect wires in hand-in-hand.
- It is recommended to use dedicated HDL Buspro cable.

Product Information

1 Button Panel A/1 Button Panel B - See Figure 6-1

4 Buttons Panel A/4 Buttons Panel B - See Figure 6-2

Dimensions - See Figure 7 - 8

Components - See Figure 9

- 1. Button:** Control targets.
- 2. RGB backlight:** Color and brightness level can be set.
- 3. Icons & text:** Support laser labelling.
- 4. HDL Buspro bus connector**

Lock/Unlock panel: Short press button A1 and A4 (see Figure 6-1, 6-2 and 7) simultaneously to lock/unlock the panel.

Backlight color setting: Press button A2 and A3 (see Figure 6-1, 6-2 and 7) simultaneously for 5 seconds, and the panel enters color selecting mode. Pressing button A2 mean selecting previous color from local color library, while pressing button A3 means selecting next color. The color will be finally determined if no operation is done within 20 seconds.

Programming mode: Press Button A3 (HDL-MP1B/TILE.48, HDL-MP2S/TILE.48, MP2B/TILE.48, MP4S/TILE.48) for 3 seconds, all backlights turn red and the panel enters programming mode.

Press any button (HDL-MP4B/TILE.48, MP4B-A/TILE.48) for 15 seconds until all backlights flash and turn blue, and the panel enters programming mode.

Upgrade mode: Press Buttons (HDL-MP1B/TILE.48, HDL-MP2S/TILE.48, MP2B/TILE.48, MP4S/TILE.48: Button A3 and A4; HDL-MP4B/TILE.48, MP4B-A/TILE.48: Button A2 and A3) simultaneously before powered on, release the buttons after being powered on for 3 seconds, then the panel enters upgrade mode.

Product installation

(Take HDL- MP4B/TILE.48 as an example)

Installation - See Figure 10

- Step 1. Install the wall box in the wall.
- Step 2. Secure the power interface to the wall box with screws.
- Step 3. Install the panel on the power interface.
- Step 4. Install the frame around the panel.

Horizontal installation - See Figure 11

Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be wall box mounted. HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or replace parts, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

Package Contents

Panel*1 / Datasheet*1

Technical Data

Basic Parameters

Working voltage	12~30V DC
Working current	HDL-MP1B/TILE.48: 9.5mA/24V DC HDL-MP2S/TILE.48: 13.4mA/24V DC HDL-MP2B/TILE.48: 13.4mA/24V DC HDL-MP4S/TILE.48: 13.5mA/24V DC HDL-MP4B/TILE.48: 13.5mA/24V DC HDL-MP4B-A/TILE.48: 13.5mA/24V DC
Communication	HDL Buspro
Cable diameter of Buspro terminal	0.6-0.8mm

External Environment

Working temperature	-5°C~45°C
Working relative humidity	≤90%
Storage temperature	-20°C~60°C
Storage relative humidity	≤93%

Specifications

Dimensions	Plastic version: 86×86×11(mm)
Net weight	Plastic version: 64g
Housing material	Plastic version: Flame retardant PC
Installation	Wall box (See Figure 10)
Protection rating (Compliant with EN 60529)	IP20

Name and Content of Hazardous Substances in Products

Components	Hazardous substances					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Chromium VI (Cr (VI))	Poly-brominated biphenyls (PBB)	Poly-brominated diphenyl ethers (PBDE)
Plastic	o	o	o	o	o	o
Hardware	o	o	o	o	-	-
Screw	o	o	o	x	-	-
Solder	x	o	o	o	-	-
PCB	x	o	o	o	o	o
IC	o	o	o	o	x	x

The symbol “-” indicates that the hazardous substance is not contained.

The symbol “o” indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015.

The symbol “x” indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.

HDL Buspro Cable Guide

HDL Buspro	HDL Buspro Cable
DATA+	Yellow
DATA-	White
COM	Black
24V DC	Red

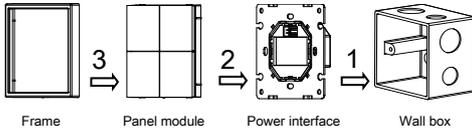


Figure 10. Installation

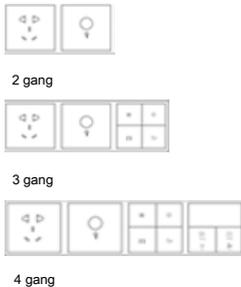


Figure 11. Horizontal installation

Notes: Plastic panels can be only installed horizontally.

Product name	Frame Types	Gang	Dimensions
2/3/4-gang frames	Plastic	2 gang	172*86*11(mm)
		3 gang	258*86*11(mm)
		4 gang	344*86*11(mm)

Technical support

E-mail: hdtickets@hdlautomation.com
Website: <https://www.hdlautomation.com>

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.